
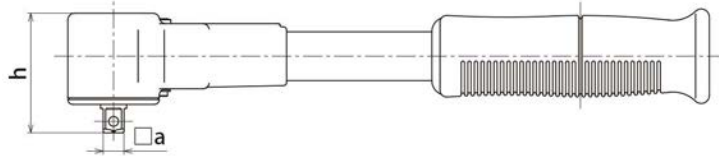




SPECIFICATIONS

| MODEL | | | QSPCA6N | QSPCA12N | QSPCA30N | QSPCA70N | |
|----------------------------------|--|-------------|----------------|----------|----------|----------|------|
| S.I. TORQUE RANGE [N · m] | | MIN. ~ MAX. | 2~6 | 4~12 | 10~30 | 20~70 | |
| METRIC TORQUE RANGE [kgf · cm] | | MIN. ~ MAX. | 20~60 | 40~120 | 100~300 | 200~700 | |
| AMERICAN TORQUE RANGE [lbf · in] | | MIN. ~ MAX. | 20~50 | 40~100 | 90~270 | 180~620 | |
| DIMENSION[mm] | | | OVERALL LENGTH | L | 197 | 267 | 346 |
| | | | SQ. DRIVE | a | 6.35 | 9.53 | |
| | | | HEAD | R | 14 | 17 | 21.5 |
| | | | HEIGHT | h | 37 | 48 | 58 |
| | | | BODY | e | 34 | 40.5 | 49 |
| | | | | ϕd | 15 | 20 | 27.2 |
| | | | | Φd | 29 | 34 | - |
| WEIGHT[kg] | | | 0.33 | 0.64 | 1.24 | | |
| ACCURACY[%] | | | ±6 | ±4 | | | |

DIMENSIONS

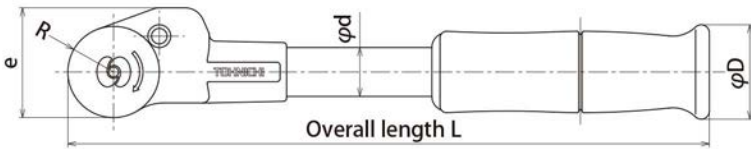

QSPCAMS6N~30N

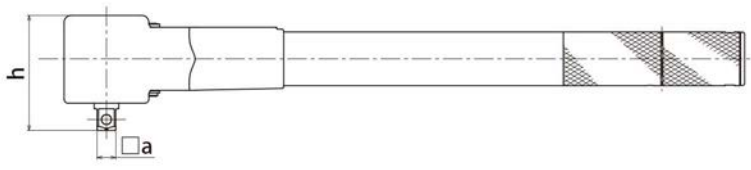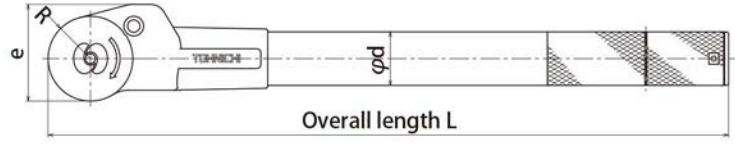

QSPCA70N